

AQ-124YS

2" Y Type Screen Filter

AQUA



Adding a New Model in our existing range of Filters
Introducing 2" Screen Filter


Features

- Available in 2" BSPT/NPT male thread connection
- Body made of reinforced Polypropylene for durability
- Corrosion resistant
- Easy to install
- Low maintenance
- Wide range of flow rate
- Also available in 80 mesh & 150 mesh

Specifications

Nominal Size, mm	50 mm, (2") BSPT/NPT
Nominal operating pressure	2 kg/cm ²
Connection type	Threaded
Mesh	120 mesh/130 micron
Body and Cap	Polypropylene with Glass filled
Filter Element	Nylon/SS-304
Maximum Flow Recommended	20 m ³ /h
Range of Flow Rate	18-22 m ³ /h
Maximum Operating Pressure	6 kg/cm ²
Maximum Temperature	60° C
Clean Pressure Drop	Max. 0.30 kg/cm ² at 20 m ³ /h flow rate
Safe maximum pressure drop	Maximum 0.50 kg/cm ²

Performance Graph AQ-124YS

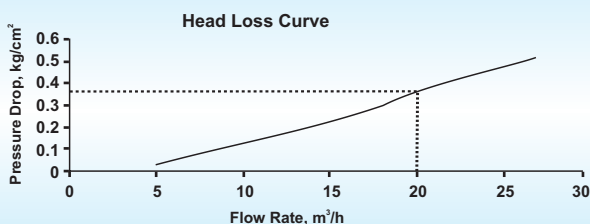

* Curve obtained during lab tests at room temperature, with fresh water and free discharge and a 120 mesh filter.



AUTOMAT INDUSTRIES PVT. LTD.

E-mail : contactus@automatworld.com Website: www.automatworld.com